

OptiDrive

LINEAR LED DRIVERS

Isolated SELV

- ⚙️ AOC (Adjustable Output Current)
- ⚙️ 0-10V/PWM 2 CH
- ⚙️ DALI DT8





Dimming Pool	Isolation Type	Model	Part No.	Power (W)	Input Voltage (V)	Output Voltage (VDC)	Rated Current (mA)	Efficiency Max(%)*	Ripple at 100Hz (%)	Ambient temp. range(°C)	T _c Max °C	Lifetime (hrs)	Protection Class	Standard Pack (pcs.)
0-10V	Isolated, SELV	LD51C 2 0-10V	2001708	21-50	176-264	30-48	700-1200	≥88%	<10%	-25....+50	85	50000	I	10
0-10V	Isolated, SELV	LD36C 2 0-10V	2001709	15-35	176-264	30-48	500-1000	≥88%	<10%	-25....+50	85	50000	I	10
0-10V	Isolated, SELV	LD25C 2 0-10V	2001710	7.5-24	176-264	30-48	250-700	≥88%	<10%	-25....+50	85	50000	I	10
PWM	Isolated, SELV	LD51C 2 PWM	2001711	21-50	176-264	30-48	700-1200	≥88%	<10%	-25....+50	85	50000	I	10
PWM	Isolated, SELV	LD36C 2 PWM	2001712	15-35	176-264	30-48	500-1000	≥88%	<10%	-25....+50	85	50000	I	10
PWM	Isolated, SELV	LD25C 2 PWM	2001713	7.5-24	176-264	30-48	250-700	≥88%	<10%	-25....+50	85	50000	I	10
DALI DT8	Isolated, SELV	LD51C 2 DALI DT8	2001714	21-50	176-264	30-48	700-1200	≥88%	<10%	-25....+50	85	50000	I	10
DALI DT8	Isolated, SELV	LD36C 2 DALI DT8	2001715	15-35	176-264	30-48	500-1000	≥88%	<10%	-25....+50	85	50000	I	10
DALI DT8	Isolated, SELV	LD25C 2 DALI DT8	2001716	7.5-24	176-264	30-48	250-700	≥88%	<10%	-25....+50	85	50000	I	10




Standards

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2
- EN 62384
- EN 55015

Safety

- Protection against transient main peaks upto 2 kV (between L and N) upto 3 kV (between L, N and PE)

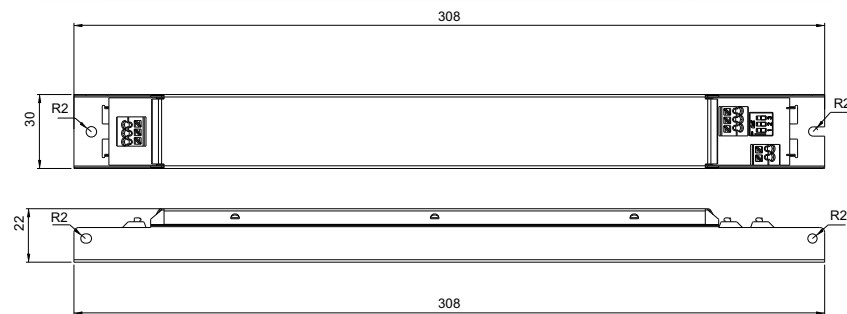

www.luxtone-global.com | **luxtone**

info@luxtone-global.com
INDIA | UAE | USA